

TITAN 13.6 m 3-Axle Aluminium THINWALL® KEITH® WALKING FLOOR® Stainless Steel Slats

Custom Built For: JENS KEIL INTERNATIONALE TRANSPORTE

Specifications

Payload

Multi-purpose bulk products (waste, recyclables, glass, agricultural)

| Dimensions | |
|----------------|-------------------------|
| Length | 13.6 m |
| Width | 2.5 m |
| Overall Height | 4 m |
| Volume | 90 m³ |
| Weight | 8953 kg (includes tarp) |

| Running Gear | |
|-------------------|---------------------------------|
| Axles/Suspensions | SAF Off Road |
| ABS | 2S/2M WABCO EU system |
| Brake Type | Disc |
| Brake System | WABCO EBS |
| Tires | 385/65R 22.5 Continental HT3 |
| Landing Gear | Jost - Aluminium |




| Body | |
|-------------------|--|
| Side Panels | Aluminium patented THINWALL® horizontal hollow-core extruded panels - Bottom panel • New Generation Heavy-Duty |
| Top Rail | 101.6 mm offset |
| Front Access Door | Sealed |
| Moving Floor | KEITH® WALKING FLOOR® roll formed stainless steel slat |
| Mud flaps | Black Rubber - ahead and behind tridem group, rear of trailer |
| Lights | LED - Truck Lite |
| Rear Door | Solid van doors, dual lock rod with secondary paddle lock (air operated) |
| Bumper | Aluminium, inset from rear of trailer with fold down light protector |



TITAN 13.6 m 3-Axle Aluminium THINWALL® KEITH® WALKING FLOOR® Stainless Steel Slats



| Popular Options & Upgrades | |
|----------------------------|--|
| Sidewall | Sidewall panels can be upgraded for extreme duty applications |
| Rear Door | Hydraulic door - one piece, self locking |
| Front Wall | Eclipse radius front wall |
| Brake Type | Drum |
| Lift Axle | SAF lift kit on leading axle |
| Tarp/Roof | Light weight mesh flip roof • leak resistant Versitex® flip roof • Automatic or manual roll vinyl tarp |
| Moving Floor | V9 aluminium or steel, V18 aluminium, stainless steel slat WALKING FLOOR® |
| Clean-Out System | KEITH® CleenSweep® System |
| Remote Control | Wireless remote control system to run components (floor, tarp CleenSweep®) |
| Storage | Aluminium storage box |
| Access | Pull out ladder for easier access into the rear of the trailer |
| Lights | Additional lights along top of sidewall |
| Paint | Trailers can be custom painted |



IOB PROFILE

- Maximize your profit with larger load capacity, fuel efficiency and minimal downtime Effective performance and customer satisfaction require rapid on and off-loading with reliability
- · Long-term return-on-investment means low maintenance costs plus maximum residual value

KEY FEATURES


- The patented THINWALL® panel features a horizontal tongue-in-groove joint that allows 100% machine welding inside AND outside for end-to-end strength.
- KEITH® WALKING FLOOR® Steel coupler assembly with bolt in kingpin Aluminium frame/floor assembly Offset top rail Single top cross tube

HEAD OFFICE

1129 Hwy #3, R.R. #3 Delhi, Ontario, Canada N4B 2W6 Tel: 519-688-4826 Fax: 519-688-6453 e-mail: info@titantrailers.com

EUROPEAN OFFICE

Bolckow Industrial Estate. Grangetown, Middlesbrough Tel: + 44 (0) 1642 460660

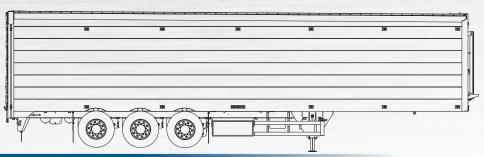

Strength Through Innovation 🌞 www.titantrailers.com

